

## W&B ROPE SOCKET - SLICKLIGHT-H

The **LIMAR**<sup>®</sup> W&B Rope Socket is designed to terminate and connect the end of the specialised W&B 0.189" (4.8mm) SlickLight-H to a toolstring.


A unique sealed Pear Drop and Sleeve arrangement can be assembled rapidly to provide and maintain a reliable grip to the wire whilst simultaneously terminating the optical fibre line and providing electrical connectivity to the toolstring below.

**TOOL APPLICATIONS:**

- For use with W&B 4.8mm (0.189") SlickLight-H to enable a reliable termination of optical fibre and copper to the toolstring below

**DESIGN FEATURES & BENEFITS:**

- Rapid mechanical and electrical assembly and disassembly
- Industry recognised GO Connections
- Dual elastomer seal arrangements throughout
- 20,000psi pressure rating
- 200degC temperature rating
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out
- Sour Service versions available

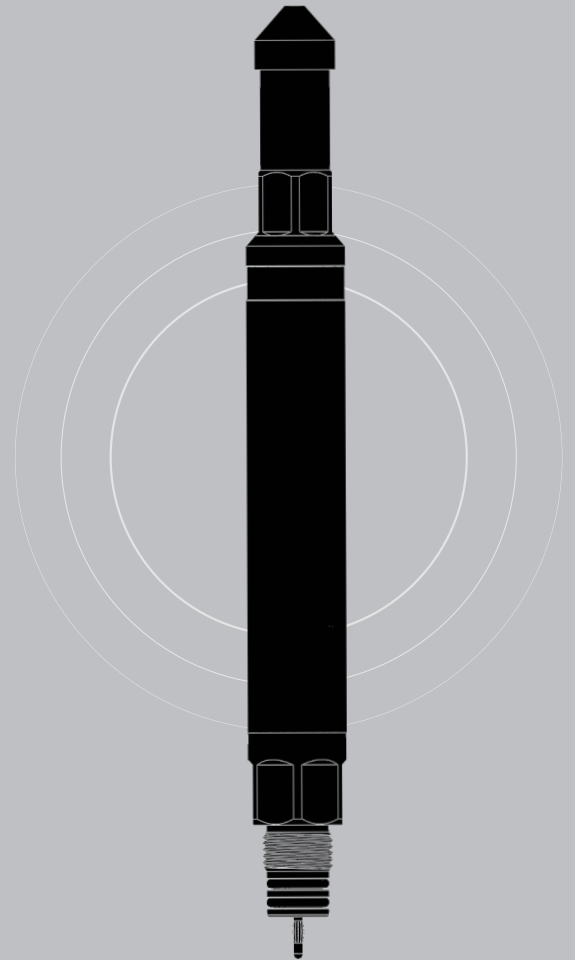

**TECHNICAL DATA**

| Assembly Part No.     | Actual OD | Wire Size / Type                | Connection          | Make Up Length | Max. Temp (degC / degF) | Max. Pressure (psi) |
|-----------------------|-----------|---------------------------------|---------------------|----------------|-------------------------|---------------------|
| 1262-1687-0189-086-RX | 1.687"    | 4.8mm (0.189") W&B SlickLight-H | 1.187"-12 UN GO Pin | 12.13"         | 200 / 392               | 20,000              |
| 1262-2125-0189-086-RX | 2.125"    | 4.8mm (0.189") W&B SlickLight-H | 1.187"-12 UN GO Pin | 12.13"         | 200 / 392               | 20,000              |

For additional sizes or further information please contact [sales@limaroiltools.com](mailto:sales@limaroiltools.com)