

## W&B ROPE SOCKET - SLICKLINE C

The **LIMAR**<sup>®</sup> W&B Rope Socket is designed to terminate and connect the end of the specialised W&B 0.181" (4.6mm) Slickline C to a toolstring.


A unique sealed Pear Drop and Sleeve arrangement can be assembled rapidly to provide and maintain a reliable grip to the wire whilst the electrical termination provides electrical connectivity to the toolstring below.

**TOOL APPLICATIONS:**

- For use with W&B 4.6mm (0.181") Slickline C to enable a reliable attachment to the toolstring

**DESIGN FEATURES & BENEFITS:**

- Rapid mechanical and electrical assembly and disassembly
- Industry recognised GO Connections
- Dual elastomer seal arrangements throughout
- 20,000psi pressure rating
- 200degC temperature rating
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out
- Sour Service versions available

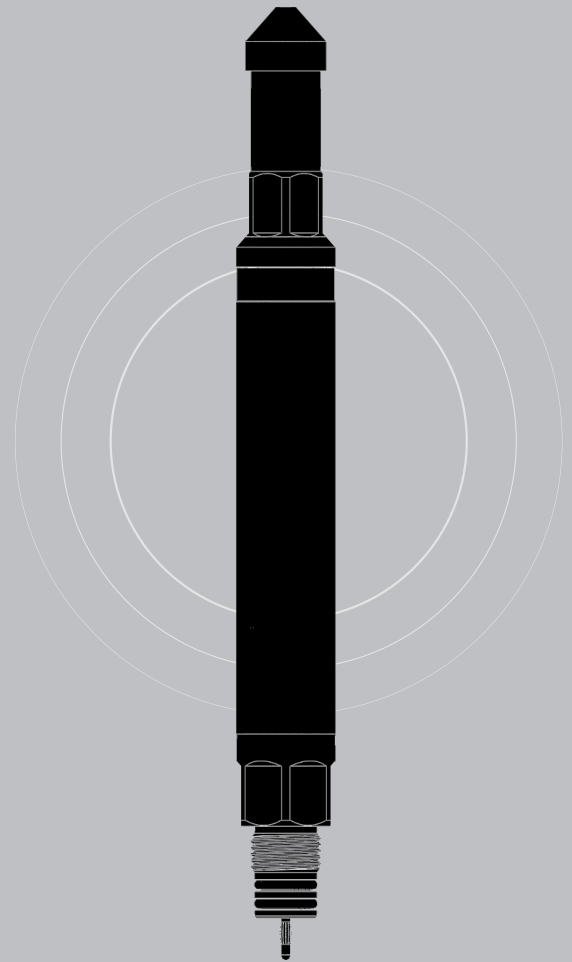

**TECHNICAL DATA**

Assembly Part No.	Actual OD	Wire Size / Type	Connection	Make Up Length	Max. Temp (degC/ degF)	Max. Pressure (psi)
1262-1687-0181-086-RX	1.687"	4.6mm (0.181") W&B Slickline C	1.187"-12 UN GO Pin	12.13"	200 / 392	20,000
1262-2125-0181-086-RX	2.125"	4.6mm (0.181") W&B Slickline C	1.187"-12 UN GO Pin	12.13"	200 / 392	20,000

For additional sizes or further information please contact [sales@limaroiltools.com](mailto:sales@limaroiltools.com)