

W&B ROPE SOCKET - SLICKLIGHT H

The **LIMAR**[®] W&B Rope Socket is designed to terminate and connect the end of the specialised W&B 0.189" (4.8mm) Slicklight H to a toolstring.


A unique sealed Pear Drop and Sleeve arrangement can be assembled rapidly to provide and maintain a reliable grip to the wire whilst simultaneously terminating the optical fibre line and providing electrical connectivity to the toolstring below.

TOOL APPLICATIONS:

- For use with W&B 4.8mm (0.189") Slicklight H to enable a reliable termination of optical fibre and copper to the toolstring below

DESIGN FEATURES & BENEFITS:

- Rapid mechanical and electrical assembly and disassembly
- Industry recognised GO Connections
- Dual elastomer seal arrangements throughout
- 20,000psi pressure rating
- 200degC temperature rating
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out
- Sour Service versions available

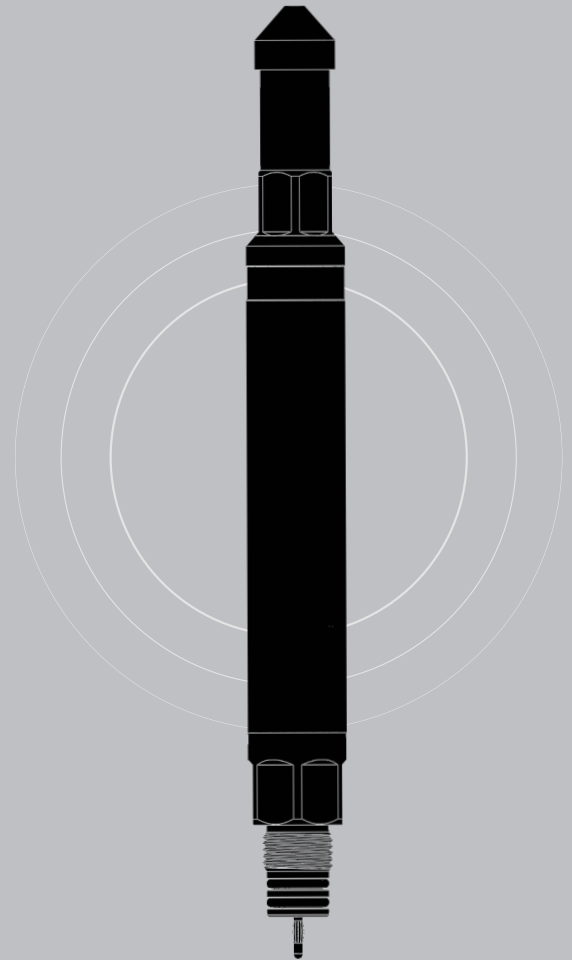

TECHNICAL DATA

Assembly Part No.	Actual OD	Wire Size / Type	Connection	Make Up Length	Max. Temp (degC / degF)	Max. Pressure (psi)
1262-1687-0189-086-RX	1.687"	4.8mm (0.189") W&B Slicklight H	1.187"-12 UN GO Pin	12.13"	200 / 392	20,000
1262-2125-0189-086-RX	2.125"	4.8mm (0.189") W&B Slicklight H	1.187"-12 UN GO Pin	12.13"	200 / 392	20,000

For additional sizes or further information please contact sales@limaroiltools.com