



The LiMAR® One Piece Slickline Rope Socket is devised to effectively attach the end of the slickline to an LQK wireline toolstring without the need for a threaded bottom sub.

Simple assembly of the pear drop & sleeve utilising the spring & spade installation tool removes the need for a threaded bottom sub, reducing toolstring length. The pear drop & sleeve assembly provides and maintains a reliable grip to the wire, especially when under load, during heavy jarring operations.




TOOL APPLICATIONS:

- For use with slickline to enable a reliable attachment to the toolstring without the need for a threaded bottom sub
- Ideal for height restricted operations and scenarios where reducing threaded connections is preferable, such as geothermal wells

DESIGN FEATURES & BENEFITS:

- To suit up to 0.160" OD slickline
- Available in toolstring OD's 1.875" and above
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated

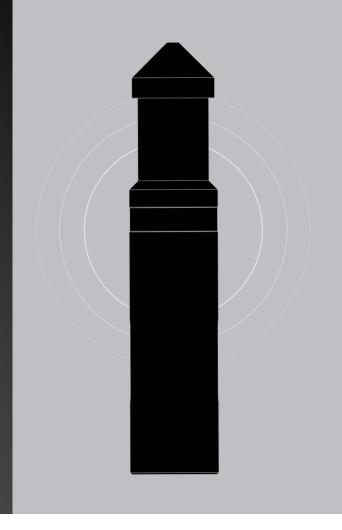

TECHNICAL DATA

Assembly Part No.	Actual OD	Fish Neck	Connection	Wire Size
1266-1875-XXXX-048-RX	1.875"	1.750"	1-7/8" LQK	Optional
1266-2125-XXXX-048-RX	2.125"	1.750"	1-7/8" LQK	Optional
1266-2125-XXXX-169-RX	2.125"	1.750"	2-1/8" LQK-HD	Optional
1266-2500-XXXX-049-RX	2.500"	2.313"	2-1/2" LQK	Optional

XXXX - Denotes wire size

For further information please contact sales@limaroiltools.com