

FLO-THRU ADJUSTABLE WIRE FINDER GRAB

The **LiMAR**[®] Flo-Thru Adjustable Wire Finder Grab is used during fishing operations to locate & retrieve parted slickline or braided line back to surface.

The finder finger OD can be altered by simply rotating the adjustable finder skirt over the tapered main body. The finder skirt is then locked in to place at the desired running OD to suit the well geometry.


The unique main body design provides extensive options of tool configuration. The interchangeable grab arms can be removed and the tool can be run solely as a wire finder to locate and ball up the top of the wire. Incorporating a ported lead impression block, magnet or centre spear further extends the operating envelope of this unique system.

TOOL APPLICATIONS:

- For locating and retrieving parted wireline back to surface

DESIGN FEATURES & BENEFITS:

- Adjustable Finder Fingers to suit varied tubing ID's / restrictions
- Removable 2, 3 or 4 pronged grab arms options
- Multiple configurations
- Inventory Reduction
- Connection options to suit customer requirements
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out

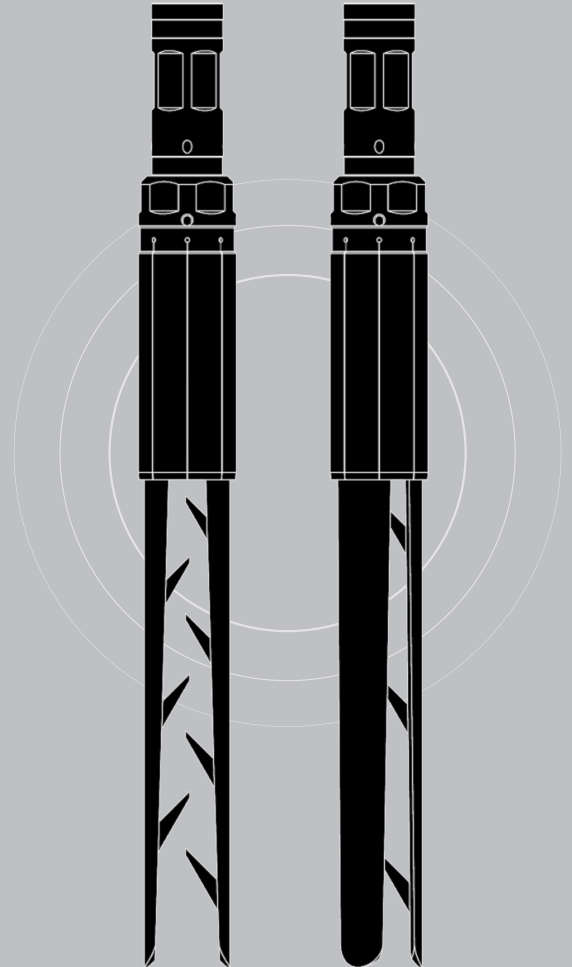

TECHNICAL DATA

Assembly Part No.	To Suit Tubing Size	Adjustment Range	Prong Grab Arm Options
188-2375-X-XXX-RX	2-3/8"	1.750" - 1.992"	2
188-2875-X-XXX-RX	2-7/8"	2.200" - 2.441"	2 or 3
188-3500-X-XXX-RX	3-1/2"	2.720" - 2.992"	2 or 3
188-4000-X-XXX-RX	4"	3.310" - 3.548"	2 or 3
188-4500-X-XXX-RX	4-1/2"	3.600" - 3.992"	2, 3 or 4
188-5000-X-XXX-RX	5"	3.800" - 4.330"	2, 3 or 4
188-5500-X-XXX-RX	5-1/2"	4.530" - 4.904"	2, 3 or 4
188-7000-X-XXX-RX	7"	5.720" - 6.184"	2, 3 or 4

X - Denotes number of grab arms

XXX - Last 3 digits of part number denotes connection type - Please refer to the connection code data sheet.

For additional sizes or further information please contact sales@limaroiltools.com