

EXTERNAL SLIP CONNECTOR

The **LiMAR**[®] External Slip Connector is a Coiled Tubing Connector designed for attaching the Coiled Tubing to the Bottom Hole Assembly.

The External Slip Connector design provides a simple but effective high torque-thru connection to the Coil, making it ideally suited for operations such as milling.


The connector is also fitted with o-ring seals & back-up rings making it suitable for high pressure applications.

TOOL APPLICATIONS:

- Connecting interface between the Coiled Tubing and BHA
- Ideal for use during torque-thru applications such as milling operations

DESIGN FEATURES & BENEFITS:

- Superior strength & torque connection
- Available in a range of sizes to suit industry standard Coiled Tubing diameters and BHA's
- Slim running OD
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out
- Connection options to suit customer requirements
- Corrosion resistant materials

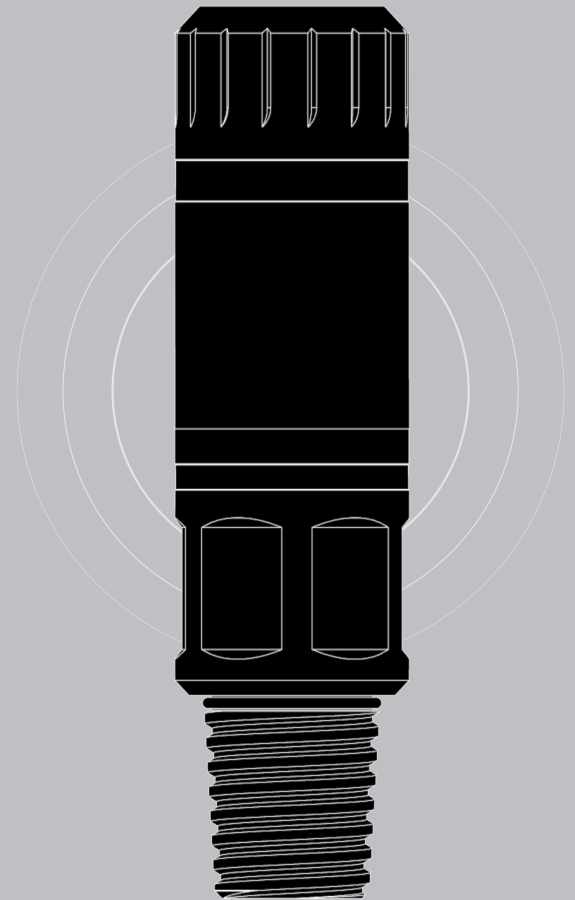

TECHNICAL DATA

Assembly Part No.	To Suit CT	Minimum OD	Make up Length
132-1000-XXX-RX	1.000"	1.687"	7.38"
132-1250-XXX-RX	1.250"	1.875"	7.91"
132-1500-XXX-RX	1.500"	2.125"	7.75"
132-1750-XXX-RX	1.750"	2.375"	8.14"
132-2000-XXX-RX	2.000"	2.750"	8.28"
132-2375-XXX-RX	2.375"	3.125"	8.28"

XXX - Last 3 digits of part number denotes connection type - Please refer to the connection code data sheet.
 For additional sizes or further information please contact sales@limaroiltools.com