

COILED TUBING CLAMP

The **LiMAR**[®] Coiled Tubing Clamps are designed for surface handling, spooling & stabbing operations.


The Hinged CT Clamp is a lightweight, yet robust product designed for the more common surface handling applications, with interchangeable slips one tool covers all CT sizes. The standard CT Clamp is a heavy duty design which can also be utilised in applications where a significant weight of CT must be safely suspended or retrieved from the well-bore.

TOOL APPLICATIONS:

- Spooling, stabbing, string recovery and all general CT surface handling applications

DESIGN FEATURES & BENEFITS:

- Available in a range of sizes to suit industry standard CT string OD's
- The Hinged Clamp features a quick lock mechanism to minimise installation time
- Designed to prevent crushing of the CT
- Simple, robust design ensuring ease of operation for the end user
- Selected Components QPO coated
- Corrosion resistant materials
- Supplied with Load Testing and NDT certificates

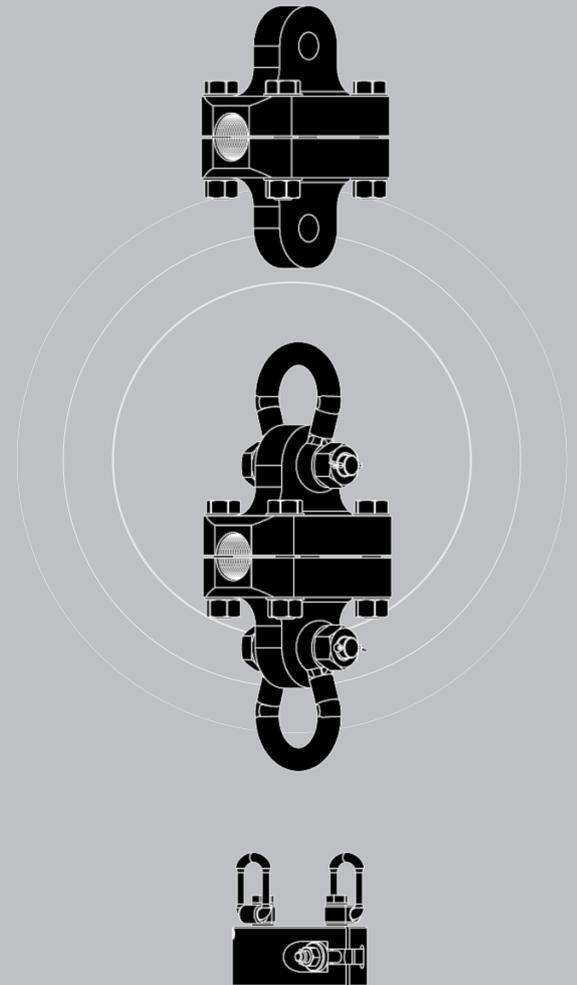

TECHNICAL DATA

Assembly Part No.	CT OD	Max Load Rating
241-1000-XX-00-R0	1.000"	35 Tonne
241-1250-XX-00-R0	1.250"	35 Tonne
241-1500-XX-00-R0	1.500"	35 Tonne
241-1750-XX-00-R0	1.750"	35 Tonne
241-2000-XX-00-R0	2.000"	35 Tonne
241-2375-XX-00-R0	2.375"	35 Tonne
241-2625-XX-00-R0	2.625"	35 Tonne
241-2875-XX-00-R0	2.875"	35 Tonne

XX Denotes connection types.
 For additional sizes or further information please contact sales@limaroiltools.com