

BLIND BOX

The **LiMAR**[®] Blind Box is connected to the wireline toolstring to provide a solid, flat face to impact against during downward jarring operations.


Due to the solid design and lack of bypass through the body of the Blind Box it can also be used as a simple device to locate fluid interface levels within the well bore.

TOOL APPLICATIONS:

- To provide a solid, flat face to impact against during downward jarring

DESIGN FEATURES & BENEFITS:

- Available in a range of sizes to suit all completion designs
- Tapered designs available
- Connection options to suit customer requirements
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out

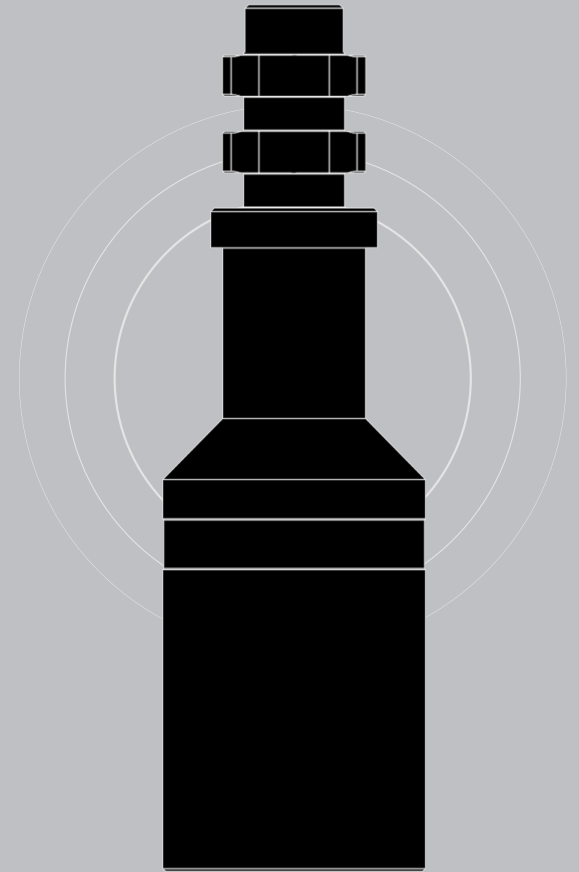

TECHNICAL DATA

Assembly Part No.	Nominal Tubing Size	To Suit Sizes Up To	Fish Neck	Connection
1035-XXXX-XXX-R0	2-3/8"	2.000"	Optional	Optional
1035-XXXX-XXX-R0	2-7/8"	2.500"	Optional	Optional
1035-XXXX-XXX-R0	3-1/2"	3.000"	Optional	Optional
1035-XXXX-XXX-R0	4-1/2"	4.000"	Optional	Optional
1035-XXXX-XXX-R0	5-1/2"	5.000"	Optional	Optional
1035-XXXX-XXX-R0	7"	6.250"	Optional	Optional

XXXX - denotes OD

XXX - Last 3 digits of part number denotes connection type

For additional sizes or further information please contact sales@limaroiltools.com