

SHOCK ABSORBER

The **LiMAR**[®] Shock Absorber is designed to reduce the risk of damage to downhole gauges during data acquisition surveys.

The LiMAR[®] Shock Absorber is particularly suited for use when gauges are to be set in a nipple profile beneath a lock mandrel.


The internal dual-acting springs help to absorb any shock during conveyance or from jarring effects during the setting and retrieval of the lock mandrel.

TOOL APPLICATIONS:

- Typically used in conjunction with downhole gauges to reduce the risk of damage during conveyance or jarring operations

DESIGN FEATURES & BENEFITS:

- Dual-acting springs for bi-directional shock absorption
- Connection options to suit customer requirements
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out

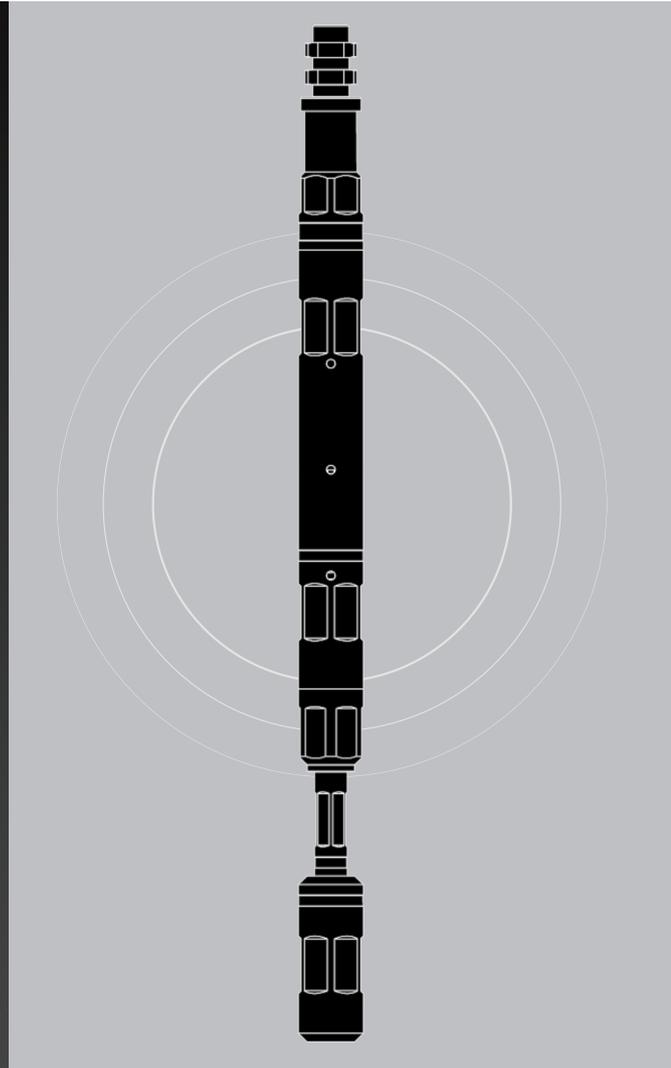

TECHNICAL DATA

Assembly Part No.	Actual OD	Fish Neck	Connection
1095-1500-XXX-RX	1.500"	Optional	Optional
1095-1750-XXX-RX	1.750"	Optional	Optional
1095-1875-XXX-RX	1.875"	Optional	Optional
1095-2500-XXX-RX	2.500"	Optional	Optional

XXX - Last 3 digits of part number denotes connection type
 For additional sizes or further information please contact sales@limaroiltools.com