



## W&B ROPE SOCKET - SLICKLIGHT-S

The **LIMAR**<sup>®</sup> W&B Optical Fibre Rope Socket is designed to terminate and connect the end of the specialised W&B SlickLight-S to a toolstring.


A unique Pear Drop and Sleeve arrangement can be assembled rapidly to provide and maintain a reliable grip to the wire whilst simultaneously terminating the optical fibre line.

**TOOL APPLICATIONS:**

- For use with W&B SlickLight-S to enable a reliable attachment to the toolstring

**DESIGN FEATURES & BENEFITS:**

- Rapid mechanical assembly and disassembly
- All mechanical slickline connection options available
- HDR (Hydraulic Delay Releasable) options available to provide release function
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out
- Sour Service versions available

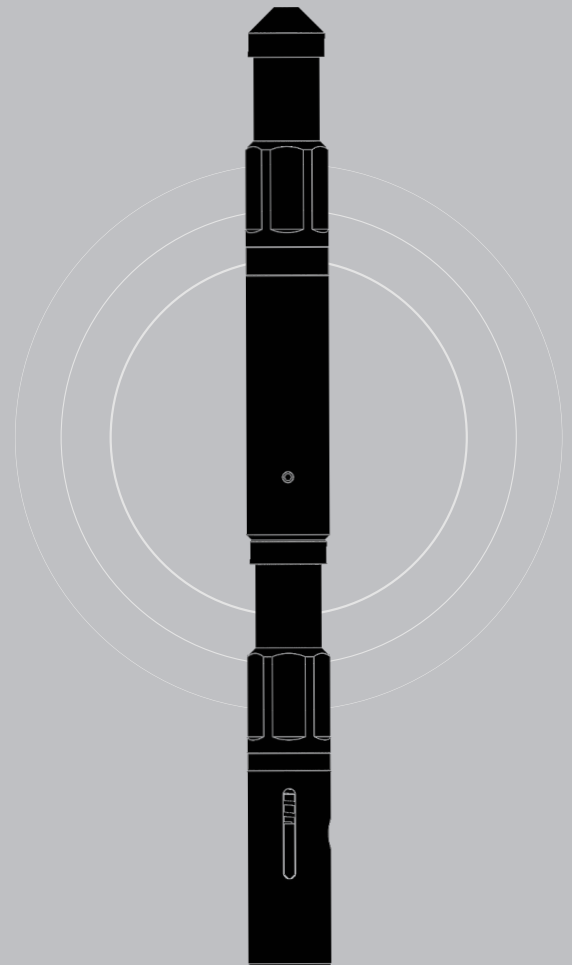

**TECHNICAL DATA**

Assembly Part No.	Actual OD	Wire Size / Type	Connection	Make Up Length
1259-1375-0159-XXX-RX	1.375"	4mm (0.159") W&B SlickLight-S	Optional	14.16" (SR)
1259-1375-0181-XXX-RX	1.375"	4.6mm (0.181") W&B SlickLight-S	Optional	14.16" (SR)

XXX - Last 3 digits of part number denotes connection type  
 For additional sizes or further information please contact [sales@limaroiltools.com](mailto:sales@limaroiltools.com)  
 For HDR Releasable options, please contact LiMAR for more information