



SLICKLINE ROPE SOCKET

The **LIMAR**[®] Slickline Rope Socket is devised to effectively attach the end of the slickline to a wireline toolstring.


A pear drop & sleeve assembly provides and maintains a reliable grip to the wire especially when under load during heavy jarring operations.

TOOL APPLICATIONS:

- For use with slickline to enable a reliable attachment to the toolstring

DESIGN FEATURES & BENEFITS:

- To suit up to 0.160" OD slickline
- Available in all standard toolstring OD's
- Connection options to suit customer requirements
- Integral LiMAR Swivel options available
- Simple, robust design ensuring ease of operation for the end user
- Selected components QPQ treated
- Hexagonal flats for safe make-up & break-out

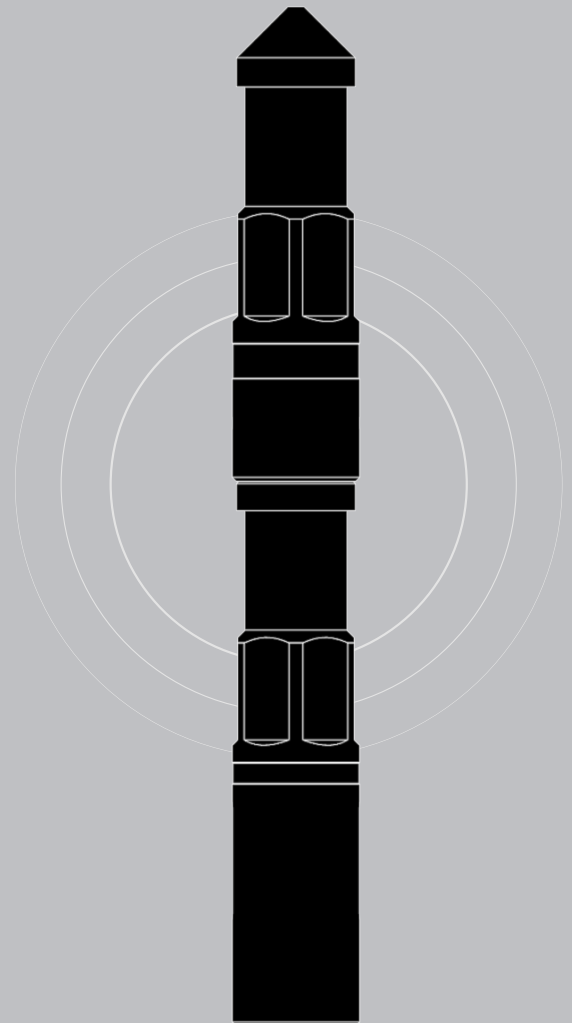

TECHNICAL DATA

Assembly Part No.	Actual OD	Fish Neck	Connection	Wire Size	Make up Length
1002-1250-XXXX-XXX-RX	1.250"	1.187"	Optional	up to 0.125"	12.00" (LQK)
1002-1500-XXXX-XXX-RX	1.500"	1.375"	Optional	up to 0.160"	14.71" (LQK)
1002-1750-XXXX-XXX-RX	1.750"	1.375"	Optional	up to 0.160"	14.71" (LQK)
1002-1875-XXXX-XXX-RX	1.875"	1.750"	Optional	up to 0.160"	14.94" (LQK)
1002-2125-XXXX-XXX-RX	2.125"	1.750"	Optional	up to 0.160"	15.77" (LQK)
1002-2500-XXXX-XXX-RX	2.500"	2.313"	Optional	up to 0.160"	17.79" (LQK)

XXXX - Denotes wire size

XXX - Last 3 digits of part number denotes connection type

For additional sizes or further information please contact sales@limaroiltools.com